


MLZ-KX18NL & SUZ-AA18NL
16,400 BTU/H CEILING-MOUNTED INDOOR UNIT
18,000 BTU/H HEAT PUMP OUTDOOR UNIT



Job Name:

System Reference:

Date:

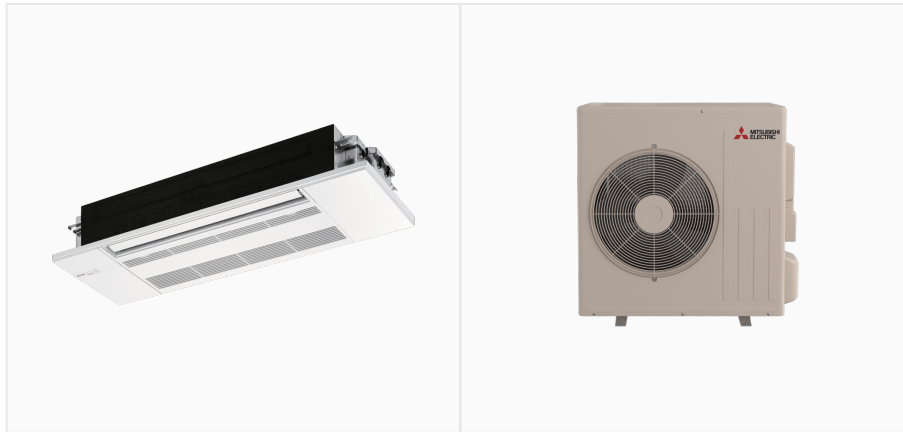

INDOOR Unit ... MLZ-KX18NL
OUTDOOR Unit ... SUZ-AA18NL

INDOOR UNIT FEATURES

- **Wi-Fi Included:** A factory-supplied Wireless Interface Adapter is included with the indoor unit for field installation.
- **Dual Barrier Coating:** Dual Barrier Coating reduces the collection of contaminants like dust, fibers, smoke, and oil on the inner surface of the indoor unit.
- **Smart Set:** Smart Set conveniently adjusts to the preferred preset temperature by pressing a single button on the remote control.
- **Auto Vane Control:** Auto Vane Control directs outlet vanes to move left, right, up, and down. This airflow control provides even temperatures throughout a space.
- **Econo Cool:** Econo Cool is feature that temporarily adjusts the airflow to maintain comfort while using less energy.

OUTDOOR UNIT FEATURES

- **Inverter Driven Compressor:** Inverter technology uses only the precise amount of energy needed to keep a space comfortable.
- **Blue Fin Coating:** Anti-corrosion coating that protects the outdoor heat exchanger against salt, sulfur, and other airborne contaminants that impact the efficiency and performance of the outdoor units.
- **Seacoast Protection:** An anti-corrosion treatment applied to the aluminum fins of the heat exchanger of the outdoor unit to protect against corrosion caused by salt, sulfur, and other airborne contaminants, especially in coastal and industrial areas.

SPECIFICATIONS: MLZ-KX18NL & SUZ-AA18NL

Cooling at 95F ¹	Maximum Capacity	Btu/h	16400
	Rated Capacity	Btu/h	16400
	Minimum Capacity	Btu/h	5200
	Maximum Power Input	W	1390
	Rated Power Input	W	1390
	Moisture Removal	Pints/h	4.20
	Sensible Heat Factor		0.71
	Power Factor [208V / 230V]	%	98 / 98
Heating at 47F ²	Maximum Capacity	Btu/h	21000
	Rated Capacity	Btu/h	19000
	Minimum Capacity	Btu/h	8100
	Maximum Power Input	W	2080
	Rated Power Input	W	1796
	Power Factor [208V / 230V]	%	98 / 98
Heating at 17F ³	Maximum Capacity	Btu/h	12600
	Rated Capacity	Btu/h	12600
	Maximum Power Input	W	1370
	Rated Power Input	W	1370
Heating at 5F ⁵	Maximum Capacity	Btu/h	10000
	Maximum Power Input	W	976
Heating at -4F ⁶	Maximum Capacity	Btu/h	8100
Efficiency	SEER2		17.20
	EER2 ¹		11.70
	HSPF2 [IV]		10
	COP at 47°F ²		3.10
	COP at 17°F at Maximum Capacity ³		2.60
	COP at 5°F at Maximum Capacity ⁵		3.00
	COP at -4°F at Maximum Capacity ⁶		2.39
	ENERGY STAR® Certified		Yes
Electrical	Voltage, Phase, Frequency	V AC / V AC , Ø , Hz	208 / 230 , 1 , 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
	Recommended Fuse/Breaker Size (Outdoor)	A	30
	Recommended Wire Size [Indoor - Outdoor]	AWG	14
Indoor Unit	MCA	A	1
	Fan Motor Output	W	30
	Fan Motor Type		DC Motor
	Airflow Rate at Cooling, Dry	CFM	212 , 293 , 346 , 403
	Airflow Rate at Heating, Dry	CFM	212 , 311 , 364 , 417
	Sound Pressure Level [Cooling]	dB (A)	29 , 36 , 41 , 47
	Sound Pressure Level [Heating]	dB (A)	26 , 37 , 42 , 48
	Drain Pipe Size O.D.	inch [mm]	1-1/16 [26]
	Condensate Lift Mechanism, Max Height	inch [mm]	19-11/16 [500]
	Dual Barrier Coating on Fan		Yes
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	43-3/8 x 14-3/16 x 7-5/16 [1102 x 360 x 185]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	46-3/8 x 11-3/16 x 15-3/4 [1177 x 284 x 400]
	Unit Weight	lbs [kg]	34 [15.50]
	Package Weight	lbs [kg]	42 [19]
IDU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	90 , 73 / 66 , 59
	Heating Intake Air Temp [Maximum / Minimum]	°FDB	83 / 50
Outdoor Unit	MCA	A	25
	MOCP	A	42
	Fan Motor Output	W	50

Notes

¹Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB

²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB

³Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

⁵Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

**Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

⁶Heating at -4°F (Indoor // Outdoor) °F 70 DB, 60 WB // -4 DB, -5 WB

SPECIFICATIONS: MLZ-KX18NL & SUZ-AA18NL

Outdoor Unit	Airflow Rate Cooling	CFM	2193
	Airflow Rate Heating	CFM	1949
	Defrost Method		Reverse Cycle
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes , Yes
	Sound Pressure Level, Cooling ¹	dB (A)	54
	Sound Pressure Level, Heating ²	dB (A)	55
	Compressor Type		Twin Rotary
	Compressor Model		SRB172FQHMT
	Compressor Oil [Type // Charge]	// oz	RM68EH // 14.5
	External Finish Color		Munsell No.3Y 7.8/1.1
	Base Pan Heater		Optional
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	33-1/16 x 13 x 34-5/8 [840 x 330 x 880]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	38-5/8 x 16-9/16 x 39 [980 x 420 x 990]
	Unit Weight	lbs [kg]	115 [52.16]
	Package Weight	lbs [kg]	133 [60.33]
ODU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum*]	°FDB	115 / 14
	Cooling Thermal Lock-out / Re-start Temperatures**	°FDB	-1 / 3
	Heating Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	75 , 65 / -4 , -5
	Heating Thermal Lock-out / Re-start Temperatures**	°FDB	-14 / -4
Refrigerant	Type		R454B
	Pre-Charged Refrigerant Amount	lbs	3
	Maximum Pre-Charged Piping Length	ft [m]	25 [7.60]
	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0.22
Piping	Liquid Pipe Size O.D. [Flared]	inch [mm]	1/4 [6.35]
	Gas Pipe Size O.D. [Flared]	inch [mm]	1/2 [12.72]
	Maximum Piping Length	ft [m]	100 [30.48]
	Maximum Height Difference	ft [m]	50 [15.24]
	Maximum Number of Bends		10
Notes ¹ Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB ² Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB ³ Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB ⁵ Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB *Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions. **Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures. ⁶ Heating at -4°F (Indoor // Outdoor) °F 70 DB, 60 WB // -4 DB, -5 WB			

INDOOR UNIT ACCESSORIES: MLZ-KX18NL

Condensate	Sauermann Condensate Pump 120-230V up to 60k BTU/h	☐	SI30-230
	Refco Condensate Pump 100-240V up to 120k BTU/h	☐	COMBI
	Blue Diamond MegaBlue Condensate Pump with Reservoir Sensor 115-230V up to 170k BTU/h	☐	X87-835
	Blue Diamond MaxiBlue Condensate Pump with Reservoir Sensor 115-230V up to 48k BTU/h	☐	X88-721
	Blue Diamond Sensor Extension Cable 15 Ft	☐	C13-103
	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	☐	X87-711
	Blue Diamond MicroBlue Mini Condensate Pump 110208230V up to 18000 BTUH	☐	X86-003
Control Interface	Thermostat Interface for 3rd Party Thermostats	☐	PAC-US445CN-1
	Wireless Interface 2 for Comfrot app	☐	PAC-USWHS002-WF-2
	Airzone Wireless Lite Controller Black	☐	AZZBSLITERN
	Procon BACnet® and Modbus® Interface	☐	PAC-UKPRC001-CN-1
	Airzone Wired Blueface Controller Black	☐	AZZBSBLUEZEROCN
	IT Extender	☐	PAC-WHS01IE-E
	Airzone Wireless Think Controller White	☐	AZZBSTHINKRB
	Airzone Wired Blueface Controller White	☐	AZZBSBLUEZEROCB
	Airzone Wireless Think Controller Black	☐	AZZBSTHINKRN
	Airzone Wireless Lite Controller White	☐	AZZBSLITERB
	kumo station® for Comfort app	☐	PAC-WHS01HC-E
	M-NET adapter ²	☐	MAC-334IF-E
Disconnect Switch	30A600VUL fits 2 X 4 utility box - White	☐	TAZ-MS303W
	30A600VUL fits 2 X 4 utility box - Black	☐	TAZ-MS303
Drain Hose	Flexible Mini-Split Drain Hose	☐	DRX-16
Filter	Microparticle Filter	☐	MAC-EMF515FT-E
	Anti-allergy Enzyme Filter	☐	MAC-408FT-E
Grille	Grille (Decoration panel)	☒	MLP-449WU-U1
Lineset	1/4 x 1/2 Lineset Twin-Tube Insulation - 15 feet	☐	MLS141212T-15
	1/4 x 1/2 Lineset Twin-Tube Insulation - 50 feet	☐	MLS141212T-50
	1/4 x 1/2 Lineset Twin-Tube Insulation - 100 feet	☐	MLS141212T-100
	1/4 x 1/2 Lineset Twin-Tube Insulation - 65 feet	☐	MLS141212T-65
	1/4 x 1/2 Lineset Twin-Tube Insulation - 30 feet	☐	MLS141212T-30
Remote Sensor	Remote Temperature Sensor for MFZ MLZ and MSZ models	☐	M21EAA307
	Wireless temperature and humidity sensor for Comfort app	☐	PAC-USWHS003-TH-1
Terminal Signal Adapter	Backup Heat Relay Kit	☐	CN24RELAY-KIT-CM3
Wired Remote Controller	Deluxe Wired MA Remote Controller ¹	☐	PAR-42MAAUB
	Simple MA Remote Controller ¹	☐	PAC-YT53CRAU-J
	Simple Direct Wired Remote Controller	☐	PAC-SDW01RC-1
	Touch MA Remote Controller ¹	☐	PAR-CT01MAU-SB
Wireless Remote Controller	Lockdown Bracket for Wireless Handheld Remote Controllers	☐	RCMKP1CB
	Wireless RedLINK™ Remote Controller	☐	MHK2
Notes ¹ Requires MAC-334IF-E Interface to connect MA controller ² Allows IDU Connection to MA Controller: [†] Deluxe MA Remote Controller [*] Simple MA Controller [^] Touch MA Controller			


OUTDOOR UNIT ACCESSORIES: SUZ-AA18NL

Air Outlet Guide	Air Outlet Guide	☐	MAC-890SG-E
Control/Service Tool	Maintenance Tool Interface	☐	PAC-USCMS-MN-1
	M- & P-Series Maintenance Tool Cable Set	☐	M21EC0397
Drain Socket	Drain Socket	☐	MAC-871DS
Hail Guards	Hail Guard	☐	HG-A7
Mini-Split Wire	14 Gauge 4 wire MiniSplit Cable250 ft roll	☐	S144-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	☐	S144-50
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐	SW144-50
	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐	SW144-250
Mounting Pad	Condensing Unit Mounting Pad 16 x 36 x 3	☐	ULTRILITE1
Muffler	Muffler	☐	MAC-002MF-E
Optional Defrost Heater	Base Heater	☐	MAC-660BH-U
Snow/Rain Diverter	SnowRain Diverter	☐	SRD-3
Stand	Condenser Wall Bracket	☐	QSWB2000M-1
	24 Single Fan Stand	☐	QSMS2401M
	Outdoor Unit Stand 12 High	☐	QSMS1201M
	Condenser Wall Bracket - Stainless Steel Finish	☐	QSWBSS
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	☐	DSD-400P
	18 Single Fan Stand	☐	QSMS1801M
Notes			


INDOOR UNIT DIMENSIONS: MLZ-KX18NL

MLZ-KX18NL-U1


(TOP VIEW)

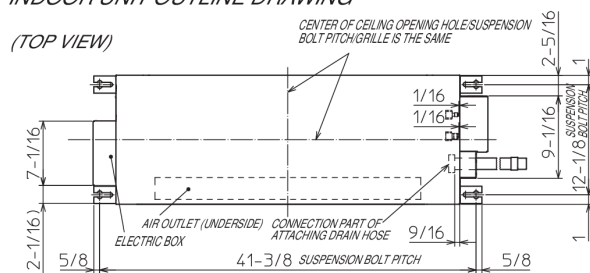

(RIGHT SIDE VIEW)

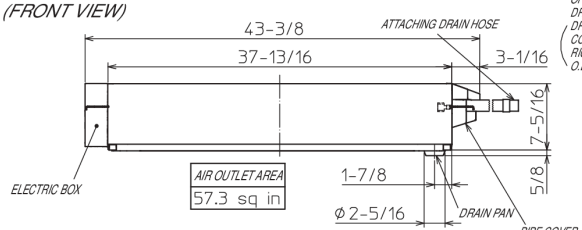


GRILLE OUTLINE DRAWING
(MLP-449WU)

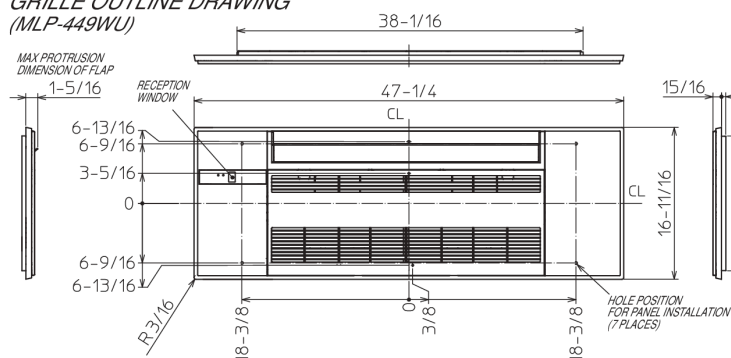


		KX09/12NL	KX18NL
EXTENSION PIPE	LIQUID PIPE O.D.	$\phi 1/4$	
	GAS PIPE O.D.	$\phi 3/8$	$\phi 1/2$
CONNECTING OF PIPE	LIQUID PIPE	FLARED CONNECTION $\phi 1/4$	
	GAS PIPE	FLARED CONNECTION $\phi 3/8$	FLARED CONNECTION $\phi 1/2$
DRAIN HOSE	HEAT INSULATOR O.D. CONNECTION I.D. EFFECTIVE LENGTH $\phi 1-1/4 \quad \phi 1 \quad 18-7/8$		
DRAIN PIPE CONNECTION		RIGID PVC PIPE O.D. $\phi 1$ (26mm)	

NOTE 1. CUT THE DRAIN HOSE (ACCESSORY) FOR USE, IF NECESSARY.

INDOOR UNIT DETAIL VIEW
(TOP VIEW)

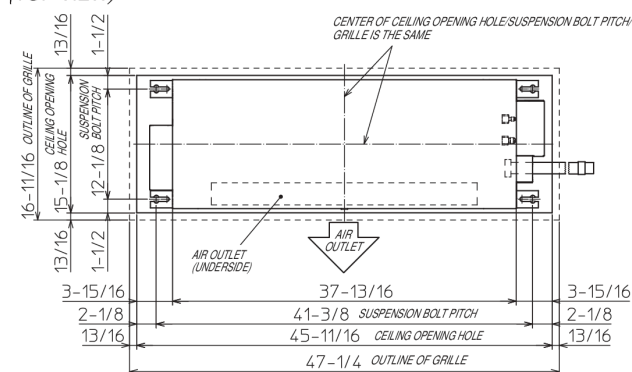


(FRONT VIEW)

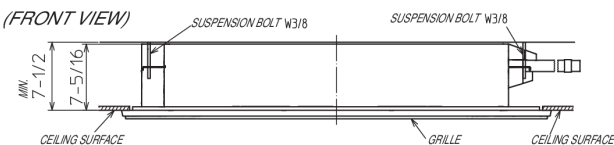

*THE METHOD FOR STANDING
DRAIN FROM INDOOR UNIT*


* CUT THE DRAIN HOSE (ACCESSORY) FOR USE, IF NECESSARY.

DRAIN PIPE
CONNECTION
RIGID PVC PIPE
O.D. $\phi 1$ (26mm)



OUTDOOR UNIT DIMENSIONS: SUZ-AA18NL

REQUIRED SPACE

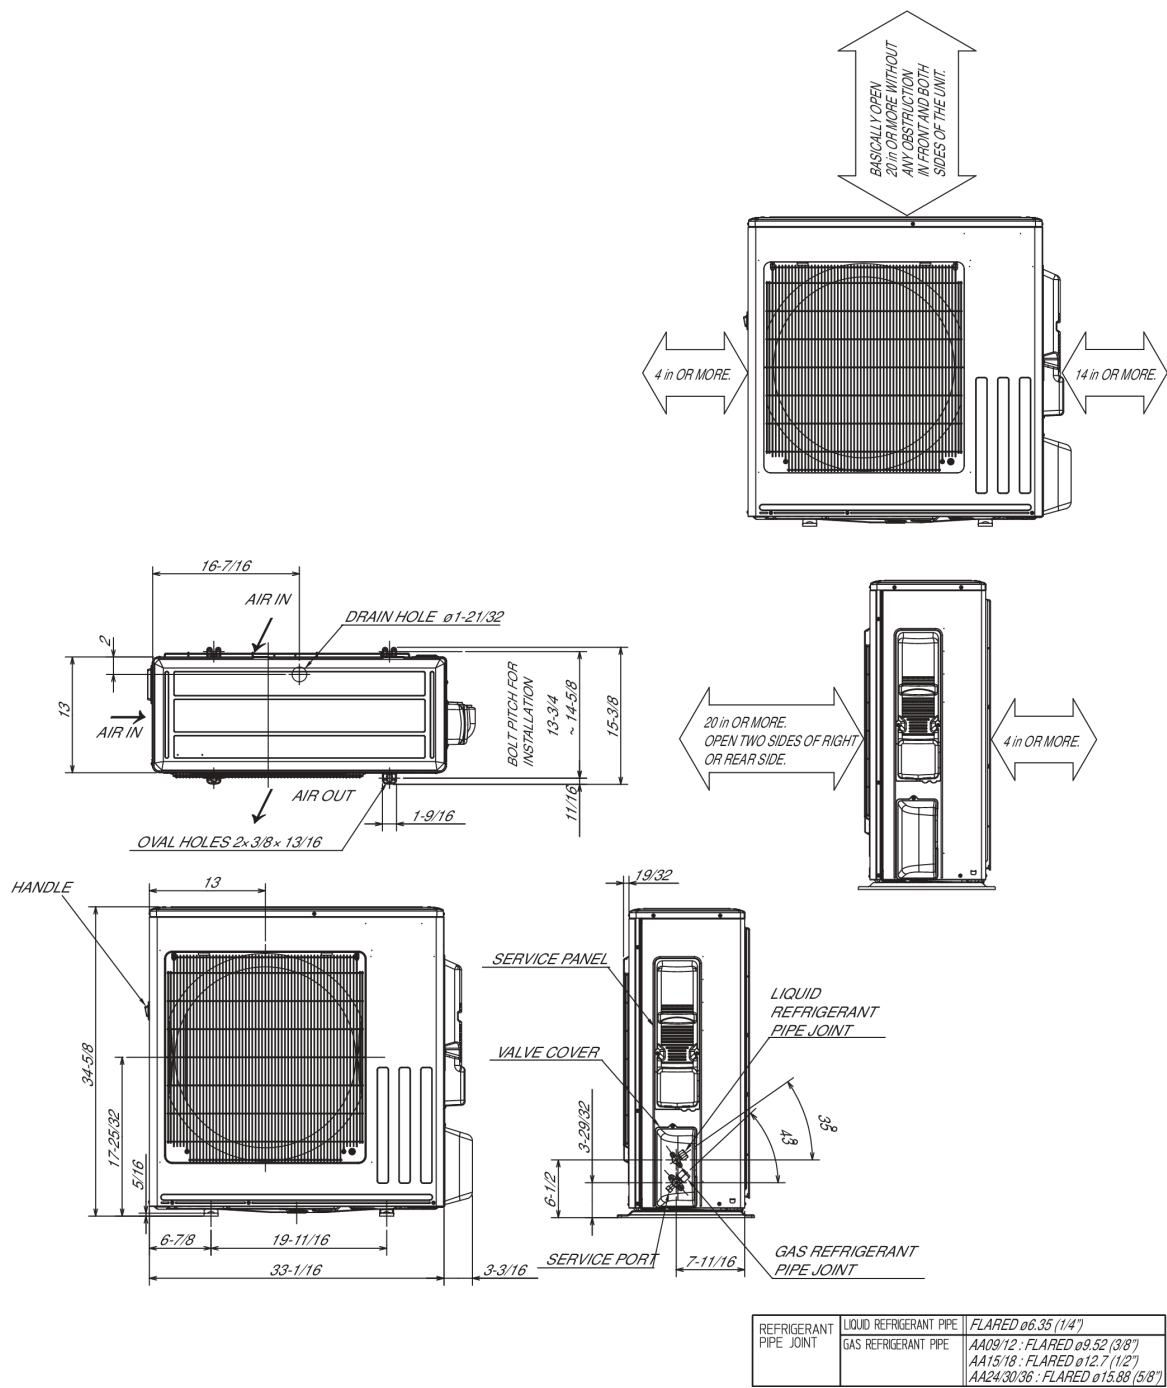

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 · mitsubishicomfort.com

METUS_2026-08_PROPIN

