

PKA-AK24NL & PUY-AH24NL
24,000 BTU/H WALL-MOUNTED INDOOR UNIT
21,200 BTU/H COOLING ONLY OUTDOOR UNIT



Job Name:

System Reference:

Date:



INDOOR Unit ... PKA-AK24NL

OUTDOOR Unit ... PUY-AH24NL

INDOOR UNIT FEATURES

- Wi-Fi Optional: A Wireless Interface Adapter can be ordered as an accessory for field installation.
- Auto Vane Control: Auto Vane Control directs outlet vanes to move left, right, up, and down. This airflow control provides even temperatures throughout a space.
- Light Commercial: Light commercial applications include small offices, restaurants, and retail.
- Horizontal Vane Control: Horizontal Vane Control allows the indoor unit vanes to be moved left and right to provide even temperatures throughout a space.
- Three Speed Fan: Adjust the fan between three speed settings to optimal comfort.
- Dual Set Point: The controller can be used to program two different set points. The unit will automatically adjust between the set points for optimum comfort.
- Swing Mode: An indoor unit with this capability can move air throughout the room like an oscillating fan.

OUTDOOR UNIT FEATURES

- Inverter Driven Compressor: Inverter technology uses only the precise amount of energy needed to keep a space comfortable.
- Blue Fin Coating: Anti-corrosion coating that protects the outdoor heat exchanger against salt, sulfur, and other airborne contaminants that impact the efficiency and performance of the outdoor units.
- Seacoast Protection: An anti-corrosion treatment applied to the aluminum fins of the heat exchanger of the outdoor unit to protect against corrosion caused by salt, sulfur, and other airborne contaminants, especially in coastal and industrial areas.
- Low Ambient Cooling: Low ambient cooling down to -40°F providing 100% capacity with front, side and rear wind baffle kit
- Low Ambient Cooling: Low ambient cooling down to 0°F providing 100% capacity with front wind baffle kit

SPECIFICATIONS: PKA-AK24NL & PUY-AH24NL

Cooling at 95F ¹	Maximum Capacity	Btu/h	24500
	Rated Capacity	Btu/h	24000
	Minimum Capacity	Btu/h	10100
	Maximum Power Input	W	2050
	Rated Power Input	W	1990
	Moisture Removal	Pints/h	6.20
	Sensible Heat Factor		0.72
	Power Factor [208V / 230V]	%	97 / 97
Efficiency	SEER2		21.1
	EER2 ¹		12
	ENERGY STAR® Certified		Yes
Electrical	Voltage, Phase, Frequency	V AC / V AC , Ø , Hz	208 / 230 , 1 , 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
	Recommended Fuse/Breaker Size (Outdoor)	A	25
	Recommended Wire Size [Indoor - Outdoor]	AWG	14
Indoor Unit	MCA	A	1
	Breaker Size	A	15
	Fan Motor Output	W	69
	Fan Motor Type		DC Motor
	Airflow Rate at Cooling, Dry	CFM	635 , 705 , 775
	Airflow Rate at Cooling, Wet	CFM	635 , 705 , 775
	Sound Pressure Level [Cooling]	dB (A)	39 , 42 , 45
	Dual Barrier Coating on Fan		No
	External Finish Color		0.7PB 9.2/0.4
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	46-1/16 x 11-5/8 x 14-3/8 [1170 x 295 x 365]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	51-3/16 x 14-3/16 x 18-9/16 [1300 x 360 x 470]
	Unit Weight	lbs [kg]	46 [21]
	Package Weight	lbs [kg]	51 [23]
IDU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	90 , 73 / 66 , 59
Outdoor Unit	MCA	A	22
	MOCP	A	37
	Fan Motor Output	W	74
	Airflow Rate Cooling	CFM	1940
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes , Yes
	Sound Pressure Level, Cooling ¹	dB (A)	49
	Compressor Type		Twin Rotary
	Compressor Model		SRB172FQHMC-L1
	Compressor Oil [Type // Charge]	// oz	RM68EH // 23
	External Finish Color		Munsell 3Y 7.8/1.1
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	37-13/32 x 14 x 37-1/8 [950 x 355 x 943]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	41-15/16 x 17-3/4 x 42-1/2 [1065 x 450 x 1079]
	Unit Weight	lbs [kg]	155 [70]
	Package Weight	lbs [kg]	179 [81]
ODU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum*]	°FDB	115 / 23
	Cooling Thermal Lock-out / Re-start Temperatures**	°FDB	N/A / N/A
Refrigerant	Type		R454B
	Pre-Charged Refrigerant Amount	lbs , oz	7 , 11
	Maximum Pre-Charged Piping Length	ft [m]	225 [69]
	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0
Piping	Liquid Pipe Size O.D. [Flared]	inch [mm]	3/8 [9.52]
	Gas Pipe Size O.D. [Flared]	inch [mm]	5/8 [15.88]
	Maximum Piping Length	ft [m]	225 [69]

Notes

¹Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB

*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Wind baffles required to operate below 23°F DB in cooling mode. • Cooling-only system with advanced wind baffle: -40°F - 115°F. • Refer to wind baffle documentation for further information.

**Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures):

SPECIFICATIONS: PKA-AK24NL & PUY-AH24NL

Piping	Maximum Height Difference	ft [m]	100 [30]
	Maximum Number of Bends		15

Notes

- ¹Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB
- ^{*}Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]); • Wind baffles required to operate below 23°F DB in cooling mode. • Cooling-only system with advanced wind baffle: -40°F - 115°F. • Refer to wind baffle documentation for further information.
- ^{**}Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures):

INDOOR UNIT ACCESSORIES: PKA-AK24NL

Condensate	Blue Diamond MaxiBlue Condensate Pump with Reservoir Sensor 115-230V up to 48k BTU/h	☐ X88-721
	Sauermann Condensate Pump 120-230V up to 60k BTU/h	☐ SI30-230
	Drain Pan Level Sensor/Control	☐ SS610E
	Blue Diamond Sensor Extension Cable 15 Ft	☐ C13-103
	Refco Condensate Pump 100-240V up to 120k BTU/h	☐ COMBI
	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	☐ X87-711
	Blue Diamond MegaBlue Condensate Pump with Reservoir Sensor 115-230V up to 170k BTU/h	☐ X87-835
	Refco Condensate Pump 100-240 VAC	☐ GOBI-II
Control Interface	Airzone Wireless Lite Controller Black	☐ AZZBSLITERN
	IT Extender	☐ PAC-WHS01IE-E
	Thermostat Interface for 3rd Party Thermostats	☐ PAC-US445CN-1
	Airzone Wireless Think Controller Black	☐ AZZBSTHINKRN
	Airzone Wireless Think Controller White	☐ AZZBSTHINKRB
	Wireless Interface 2 for Comfrot app	☐ PAC-USWHS002-WF-2
	Airzone Wired Blueface Controller Black	☐ AZZBSBLUEZEROCN
	kumo station® for Comfort app	☐ PAC-WHS01HC-E
	Procon BACnet® and Modbus® Interface	☐ PAC-UKPRC001-CN-1
	Airzone Wired Blueface Controller White	☐ AZZBSBLUEZEROCB
Disconnect Switch	30A600VUL fits 2 X 4 utility box - Black	☐ TAZ-MS303
	30A600VUL fits 2 X 4 utility box - White	☐ TAZ-MS303W
Drain Hose	Flexible Mini-Split Drain Hose	☐ DRX-16
Lineset	3/8 x 5/8 Lineset Twin-Tube Insulation - 50 feet	☐ MPLS385812T-50
	3/8 x 5/8 Lineset Twin-Tube Insulation - 10 feet	☐ MPLS385812T-10
	3/8 x 5/8 Lineset Twin-Tube Insulation - 15 feet	☐ MPLS385812T-15
	3/8 x 5/8 Lineset Twin-Tube Insulation - 100 feet	☐ MPLS385812T-100
	3/8 x 5/8 Lineset Twin-Tube Insulation - 65 feet	☐ MPLS385812T-65
	3/8 x 5/8 Lineset Twin-Tube Insulation - 30 feet	☐ MPLS385812T-30
Mini-Split Wire	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐ SW144-50
	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐ SW144-250
Remote Sensor	Wireless temperature and humidity sensor for Comfort app	☐ PAC-USWHS003-TH-1
	Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models	☐ PAC-USSEN002-FM-1
	Wall Mount Remote Temperature Sensor	☐ PAC-SE41TS-E
Terminal Signal Adapter	Connector and wire for On/Off and Error status using CN51 and CN52	☐ PAC-725AD
	Backup Heat Relay Kit	☐ CN24RELAY-KIT-CM3
	Connector and wire for On/Off and Fan command using CN32	☐ PAC-715AD
Wired Remote Controller	Simple MA Remote Controller	☐ PAC-YT53CRAU-J
	Touch MA Remote Controller	☐ PAR-CT01MAU-SB
	Deluxe Wired MA Remote Controller	☐ PAR-42MAAUB
	Simple Direct Wired Remote Controller	☐ PAC-SDW01RC-1
Wireless Remote Controller	Wireless Remote Controller	☐ PAR-SL101A-E
	Wireless MA Handheld Remote Controller (requires PAR-FA32MA-E)	☐ PAR-FL32MA-E
	Wireless RedLINK™ Remote Controller	☐ MHK2
	Lockdown Bracket for Wireless Handheld Remote Controllers	☐ RCMKP1CB


Notes

¹Requires MAC-334IF-E Interface to connect MA controller

OUTDOOR UNIT ACCESSORIES: PUY-AH24NL

Air Outlet Guide	Air Outlet Guide 1 Piece	☐	PAC-SG59SG-E
Centralized Drain Pan	Centralized Drain Pan	☐	PAC-SG64DP-E
Control/Service Tool	ControlService Tool	☐	PAC-SK52ST
	Maintenance Tool Interface	☐	PAC-USCMS-MN-1
	M- & P-Series Maintenance Tool Cable Set	☐	M21EC0397
Drain Socket	Drain Socket	☐	PAC-SG61DS-E
Hail Guards	Hail Guard	☐	HG-A6
M-NET Converter	M-Net Interface for P-Series	☐	PAC-SJ95MA-E
Mini-Split Wire	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐	SW144-50
	14 Gauge 4 wire MiniSplit Cable250 ft roll	☐	S144-250
	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐	SW144-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	☐	S144-50
Mounting Pad	Condensing Unit Mounting Pad 24 x 42 x 3	☐	ULTRILITE2
Snow/Rain Diverter	SnowRain Diverter	☐	SRD-4
Stand	18 Single Fan Stand	☐	QSMS1801M
	Outdoor Unit Stand 12 High	☐	QSMS1201M
	24 Single Fan Stand	☐	QSMS2401M
	Condenser Wall Bracket	☐	QSWB2000M-1
	Condenser Wall Bracket - Stainless Steel Finish	☐	QSWBSS
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	☐	DSD-400P
Terminal Signal Adapter	Connector and wire for On/Off and Fan command using CN32	☐	PAC-715AD
	Connector and wire for On/Off and Error status using CN51 and CN52	☐	PAC-725AD
Wind Baffle	Side Advanced Wind Baffle	☐	WB-SD5
	Front Wind Baffle	☐	WB-PA5
	Rear Wind Baffle	☐	WB-RE5
Notes			

INDOOR UNIT DIMENSIONS: PKA-AK24NL

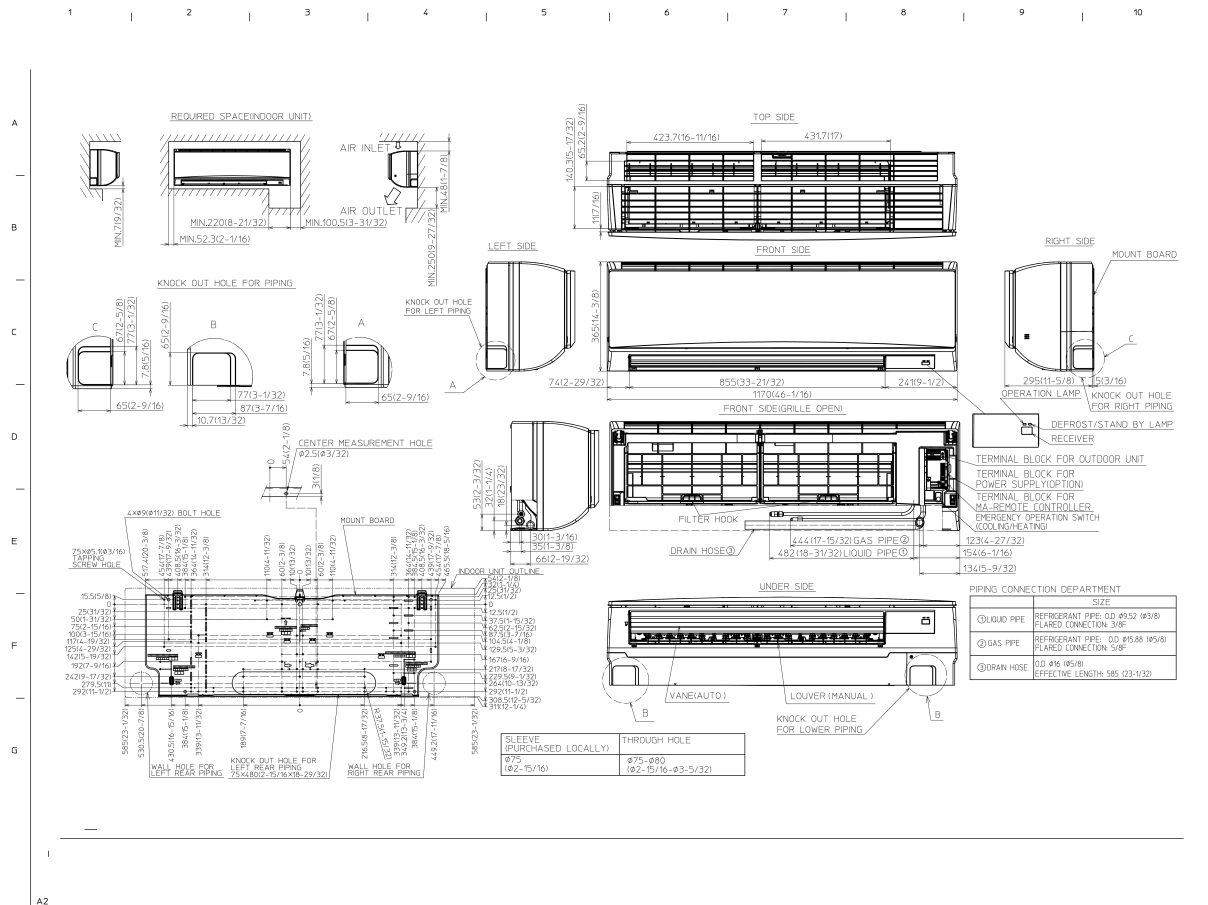


PIPING CONNECTION DEPARTMENT	
	SIZE
① LIQUID PIPE	REFRIGERANT PIPE: O.D. #9.52 (#3/8) FLARED CONNECTION: 3/8"
② GAS PIPE	REFRIGERANT PIPE: O.D. #15.88 (#5/8) FLARED CONNECTION: 5/8"
③ DRAIN HOSE	O.D. #16 (#5/8) EFFECTIVE LENGTH: 585 (23-1/32)

SLEEVE (PURCHASED LOCALLY)	THROUGH HOLE
ø75 (ø2-15/16)	ø75-ø80 (ø2-15/16-ø3-5/32)

[illegible]

METUS_2026-09_PROPIN

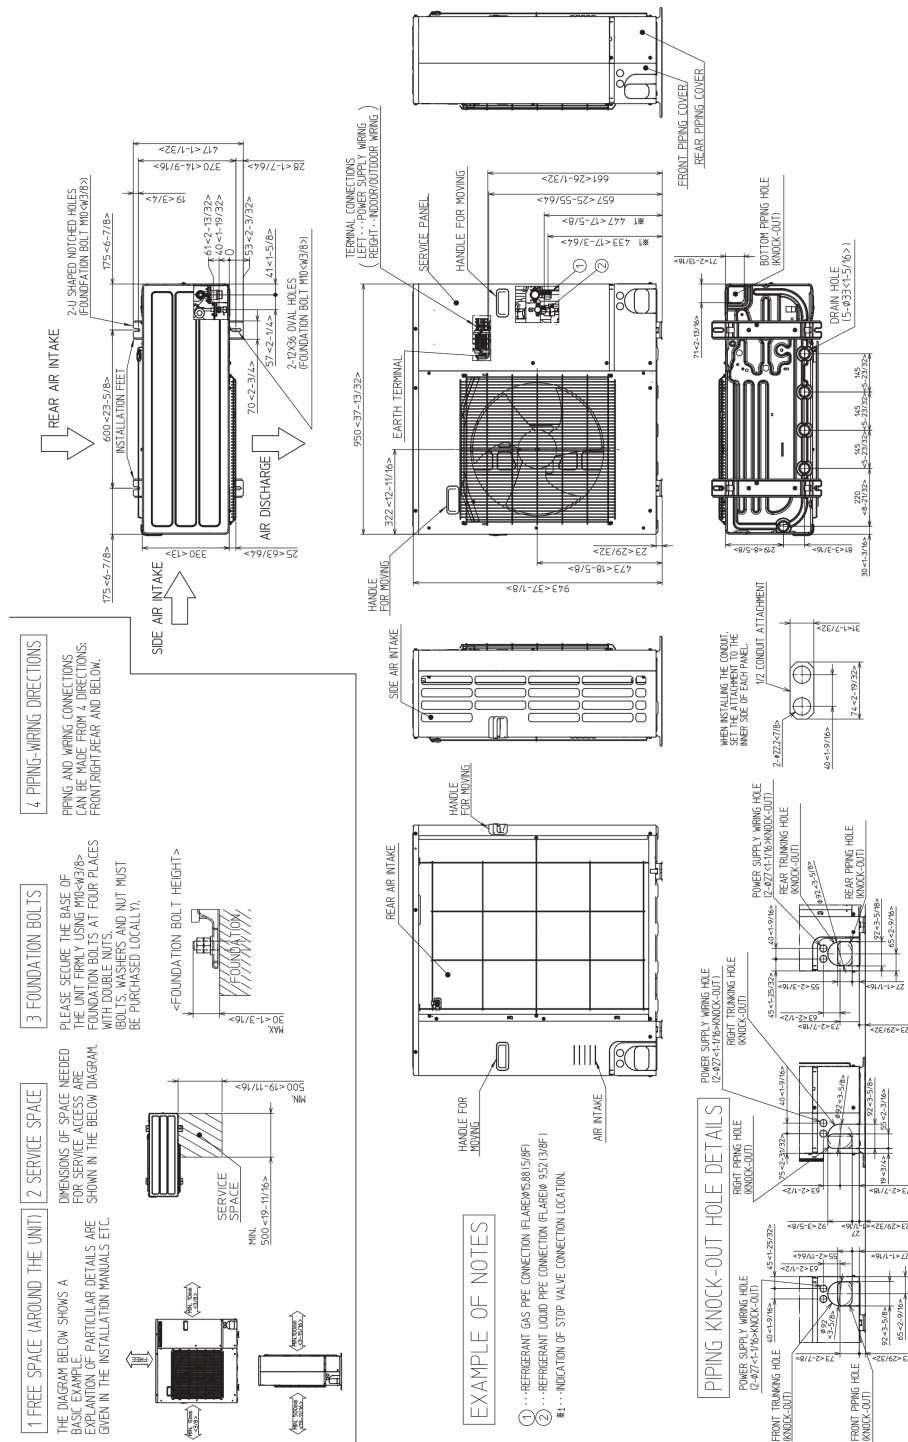

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 · mitsubishicomfort.com

